


CHEMISOL PTFE DRY SPRAY

CHEMISOL PTFE Dry Spray is a high-quality spray, suitable for the treatment of metal and plastic mechanical parts, with unwanted oil and grease residues.

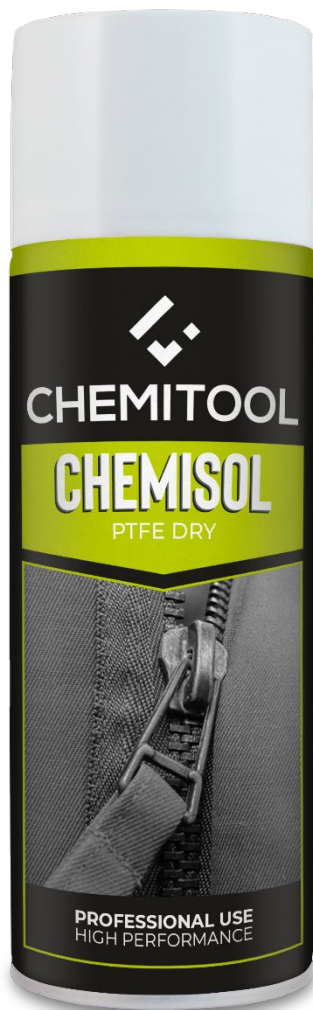

- ✓ Free of oil or fat residues (dry skin)
- ✓ Very low friction coefficient
- ✓ Excellent adhesion
- ✓ Prevents wear and adhesion
- ✓ Suitable for parts exposed to light load and low speed
- ✓ Resistant to weather influences
- ✓ Appropriate as a mould release agent, where the use of silicone is not recommended
- ✓ Direct spraying

APPLICATIONS

Recommended for rails, roofs, door locks, seat belts, zippers, wipers, towing hooks, seat slide rails, oven hinge and window rails.

INDICATIONS

The spray must be at room temperature.

The best temperature of use should be from 5°C to 30°C.

INSTRUCTIONS

Before use, shake the spray can. The surface must be clean, dry and degreased.

Apply the CHEMISOL PTFE Dry Spray in a thin layer. After evaporation of the solvent (approximately 1 minute), a protective coating will remain.



TECHNICAL SPECIFICATIONS

Color	Transparent white
Base	Polytetrafluoroethylene
EU-VOC solvent percentage	≈ 99% w/w
Appearance	White powder
Yield	1,74 g/seconds
Steam pressure at 20°C	3 to 4 bar
Temperature resistance	-50°C to +250°C
Drying	≈ 5 minutes

These values may vary depending on environmental factors such as temperature and humidity. The curing time is higher the lower the temperature and humidity and the greater the thickness of the product.

SAP	ml	Shelf Life		EAN
CHC040101	400	10 years	12	5604630050357

Note: The technical information provided, either verbally or in writing, is based on our current knowledge and should be considered as collaboration without commitment. The use of the product is beyond our control, thus, we rule out any responsibility for its improper use. The customer is responsible to confirm and validate (by testing) if the product is suitable for the process and the type of use in question. Our purpose is exclusively to guarantee the quality of the products, according to our standards.