


## CHEMISOL ELECTRO PROTECT SPRAY

CHEMISOL Electro Protect Spray is a high-quality electrical contact protector, suitable for preventing problems caused by humidity.

- ✓ **Water and humidity repellent**
- ✓ **Good impregnating properties**
- ✓ **Excellent adhesion**
- ✓ **Excellent corrosion prevention**
- ✓ **Resistant to water, salt and weak acids and base**

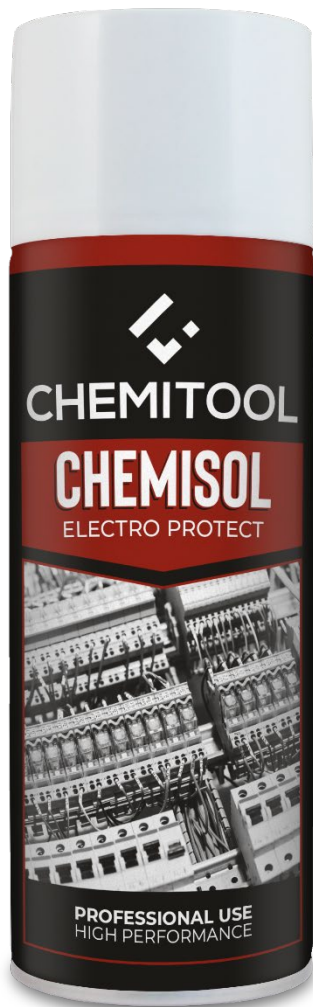

### APPLICATIONS

Recommended for switches, spark plugs, batteries, printed circuit boards, multiple sockets, distributor caps, cables, fuses, power tool, distributors, plugs, electrical systems, which must be protected from moisture.

### INDICATIONS

The spray must be at room temperature.

The best temperature of use is between 5°C and 30°C.

### INSTRUCTIONS

Before use, shake the spray can.

Switch off all electrical installations before treatment.

The parts to be treated must be clean, dry and degreased. Apply CHEMISOL Electro Protect Spray in several thin layers.

## TECHNICAL SPECIFICATIONS

Base	Mineral oil
EU-VOC solvent percentage	≈ 85% w/w
Odor	Characteristic
Relative density at 20°C	0,802 g/ml
Yield	1,9 g/seconds
Steam pressure at 20°C	3 to 4 bar
Refractive index at 25°C	1,444
PH	Neutral

These values may vary depending on environmental factors such as temperature and humidity. The curing time is higher the lower the temperature and humidity and the greater the thickness of the product.

SAP	ml	Validade			EAN
CHC050105	400	10 years	Transparent	12	5604630050449

**Note:** The technical information provided, either verbally or in writing, is based on our current knowledge and should be considered as collaboration without commitment. The use of the product is beyond our control, thus, we rule out any responsibility for its improper use. The customer is responsible to confirm and validate (by testing) if the product is suitable for the process and the type of use in question. Our purpose is exclusively to guarantee the quality of the products, according to our standards.