


CHEMISOL INDUSTRIAL CLEANER SPRAY

CHEMISOL Industrial Cleaner Spray is a high-quality degreaser, ideal for removing dirt from treated and untreated metal and various types of plastic parts.

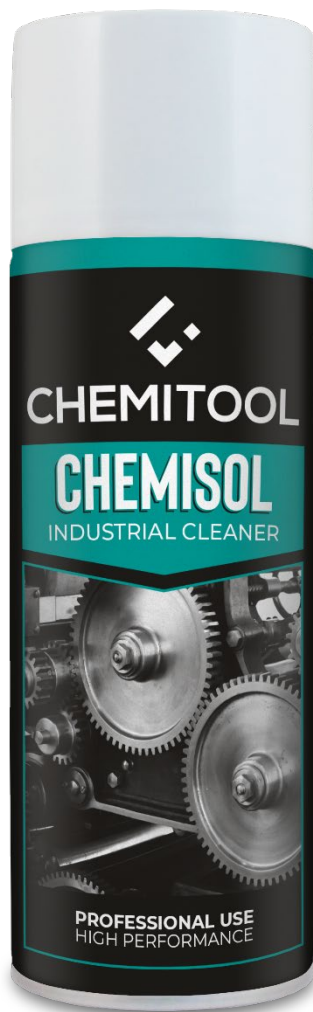

- ✓ **Strong spraying**
- ✓ **High dissolution**
- ✓ **Do not leave residues**
- ✓ **Fast evaporation**
- ✓ **Non-conductive**
- ✓ **Non-corrosive**

APPLICATIONS

Recommended for bearings, machine parts, gear wheels, garden tools, locks, garden furniture, cylinders, wooden pieces, rails, windows, fixing systems, floors and walls, shafts.

INDICATIONS

The spray must be at room temperature.

The best temperature of use should be from 5°C to 30°C.

INSTRUCTIONS

Before use, shake the spray can.

Before treatment, protect the conductive parts and disconnect electrical installations.

Spray the parts to be treated with CHEMISOL Industrial Cleaner Spray and let it work.

Remove persistent dirt with a brush. Repeat the treatment until it has disappeared completely.



TECHNICAL SPECIFICATIONS

Color	Transparent
Base	Aliphatic hydrocarbons
Propellant	Carbon dioxide (CO ₂)
EU-VOC solvent percentage	≈ 94% w/w
Odor	Characteristic
Relative density at 20°C	0,75 g/ml
Yield	3,55 g/seconds
Steam pressure at 20°C	5,5 to 6,5 bar

These values may vary depending on environmental factors such as temperature and humidity. The curing time is higher the lower the temperature and humidity and the greater the thickness of the product.

SAP	ml	Shelf Life		EAN
CHC030101	400	10 years	12	5604630050074

Note: The technical information provided, either verbally or in writing, is based on our current knowledge and should be considered as collaboration without commitment. The use of the product is beyond our control, thus, we rule out any responsibility for its improper use. The customer is responsible to confirm and validate (by testing) if the product is suitable for the process and the type of use in question. Our purpose is exclusively to guarantee the quality of the products, according to our standards.