


CHEMISOL PENETRATING OIL MOS2 SPRAY

CHEMISOL Penetrating Oil MoS2 Spray is suitable for loosening rusted parts.

- ✓ Good impregnating properties
- ✓ Contains graphite and MoS2
- ✓ Repels moisture
- ✓ Prevents corrosion
- ✓ Strong spraying

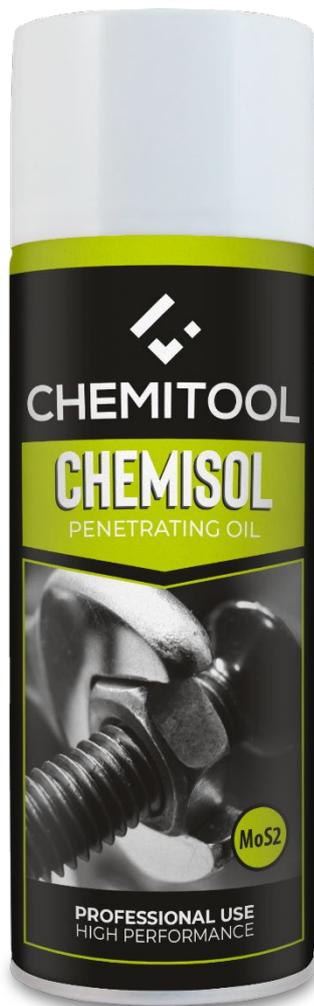

APPLICATIONS

Recommended for fastening systems (screws, bolts and nuts), tools, threaded connections, rails, gear wheels, chains, locks, garden tools and coils.

INDICATIONS

The spray must be at room temperature.

The best temperature of use should be from 5°C to 30°C.

INSTRUCTIONS

Before use, shake the spray.

Apply CHEMISOL Penetrating Oil MoS2 Spray and let it work.

TECHNICAL SPECIFICATIONS

Color	Graphite / Black
Base	Mineral oil and graphite and MoS2
EU-VOC solvent percentage	≈ 70% w/w
Odor	Characteristic
Yield	2,33 g/seconds
Relative density at 20°C	0,86 g/ml
Steam pressure at 20°C	3 to 4 bar

These values may vary depending on environmental factors such as temperature and humidity. The curing time is higher the lower the temperature and humidity and the greater the thickness of the product.

SAP	ml	Shelf Life		EAN
CHC040104	400	10 years	12	5604630050388

Note: The technical information provided, either verbally or in writing, is based on our current knowledge and should be considered as collaboration without commitment. The use of the product is beyond our control, thus, we rule out any responsibility for its improper use. The customer is responsible to confirm and validate (by testing) if the product is suitable for the process and the type of use in question. Our purpose is exclusively to guarantee the quality of the products, according to our standards.