

ZIRCONIA ALUMINA FLAP DISC

CHEMITOL Zirconia Alumina Z Flap Disc was developed for professional use in steel and stainless steel ensuring high stability during use and a long tool life.



- ✓ **Fast cooling**
- ✓ **2 hours polish**
- ✓ **Aggressive thinning**
- ✓ **Little vibration**
- ✓ **Thinning resistance, down to the last grain**
- ✓ **Great stability and job safety**
- ✓ **Long tool life**

CHEMITOOL Zirconia Alumina Z Flap Disc is composed of a mixture of abrasive grains in Zirconia Alumina Z and Aluminium Oxide A and has an excellent removal rate and durability. It aims to deburr, grind weld beads and remove varnishes and paints and imperfections from surfaces.

CHEMITOOL Zirconia Alumina Z Flap Disc flat format ensures a large grinding area for grinding surfaces, deburring, chamfering, working edges and weld beads. The conical format, has a narrower grinding area to eliminate weld beads, chamfering and deburring. To make the most of the abrasive lamellae, you must work at a contact angle with the surface from 0° to 15°.

Abrasive


Zirconia Alumina Z and Aluminium Oxide A

Suitable for






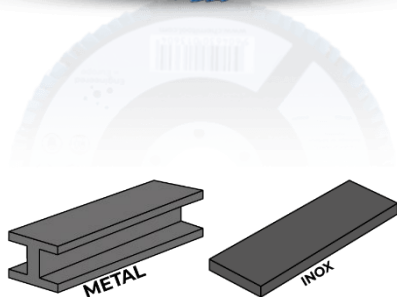











Steel and Stainless Steel (INOX)















Suitable Machines

Angle Grinder



CHEMITOOL flap discs comply with European Standards (EN 13743).

SAP	Ø (mm)	Bore Diameter (mm)		R.P.M.	Format		EAN
CHA0201115040	115	22	40	13 300		10	5604630013604
CHA0201115060	115	22	60	13 300		10	5604630013611
CHA0201115080	115	22	80	13 300		10	5604630013628
CHA0201115120	115	22	120	13 300		10	5604630013635
CHA0201125040	125	22	40	12 200		10	5604630013642
CHA0201125060	125	22	60	12 200		10	5604630013659
CHA0201125080	125	22	80	12 200		10	5604630013666
CHA0201125120	125	22	120	12 200		10	5604630013673
CHA0201150040	150	22	40	10 200		10	5604630061247
CHA0201150060	150	22	60	10 200		10	5604630061254
CHA0201150080	150	22	80	10 200		10	5604630061261
CHA0201180040	180	22	40	8 500		10	5604630013680
CHA0201180060	180	22	60	8 500		10	5604630013697
CHA0201180080	180	22	80	8 500		10	5604630013703
CHA0201180120	180	22	120	8 500		10	5604630013710

SAP	∅ (mm)	Bore Diameter (mm)		R.P.M.	Format		EAN
CHA0202115040	115	22	40	13 300		10	5604630013727
CHA0202115060	115	22	60	13 300		10	5604630013734
CHA0202115080	115	22	80	13 300		10	5604630013741
CHA0202115120	115	22	120	13 300		10	5604630013758
CHA0202125040	125	22	40	12 200		10	5604630013765
CHA0202125060	125	22	60	12 200		10	5604630013772
CHA0202125080	125	22	80	12 200		10	5604630013789
CHA0202125120	125	22	120	12 200		10	5604630013796
CHA0202180040	180	22	40	8 500		10	5604630013802
CHA0202180060	180	22	60	8 500		10	5604630013819
CHA0202180080	180	22	80	8 500		10	5604630013826
CHA0202180120	180	22	120	8 500		10	5604630013833

Note: The technical information provided, either verbally or in writing, is based on our current knowledge and should be considered as collaboration without commitment. The use of the product is beyond our control, thus, we rule out any responsibility for its improper use. The customer is responsible to confirm and validate (by testing) if the product is suitable for the process and the type of use in question. Our purpose is exclusively to guarantee the quality of the products, according to our standards.