


SEMI AUTOMATIC APPLIANCE 250A



CHEMITOOL Semi-Automatic Appliance 250A for MIG/MAG – MMA welding. Suitable for DIY, locksmiths and metalworking.

- ✓ Stable welding arc
- ✓ Welding of rigid wire
- ✓ Reels up to 15 KG

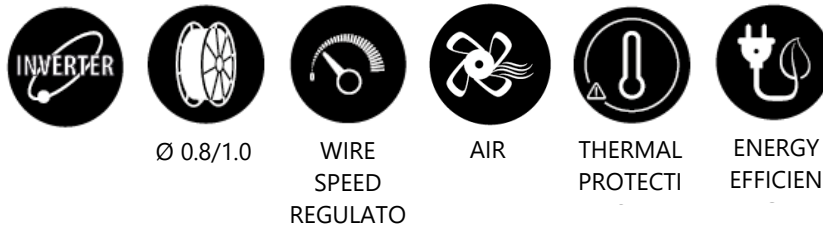

TECHNICAL SPECIFICATIONS

	CHMIG-250M	CHMIG-250
Voltage	Single-Phase 230V ±15%	Three-Phase 400V ±15%
Frequency	50/60 Hz	
Input current	36,6 A	12,7 A
Output current	50 - 250A	
Output voltage	16,5 - 26,5A	
Duty cycle	60 %	
Power factor	0,73	0,93
Efficiency	80%	85%
Wire feed speed	3 - 18 m/min	
Descent time	1.0 ± 0.5 seconds	
Wire diameter	Ø 0.8/1.0 mm	
Insulation degree	F	
Degree of protection	IP21	
Sheet thickness	Above 1.0 mm	
Output cable	Above 25 mm ²	
Weight	30 kg	

SAP	DESCRIPTION	DIMENSIONS	EAN
CHMIG-250M	Semi-Automatic Appliance 250A - 230V	455 x 202 x 372 mm	5608907615638
CHMIG-250	Semi-Automatic Appliance 250A - 400V	513 x 271 x 402 mm	5608907254820

Note: The technical information provided, either verbally or in writing, is based on our current knowledge and should be considered as collaboration without commitment. The use of the product is beyond our control, thus, we rule out any responsibility for its improper use. The customer is responsible to confirm and validate (by testing) if the product is suitable for the process and the type of use in question. Our purpose is exclusively to guarantee the quality of the products, according to our standards.