






ENERGY ABSORBER 31-A WITHOUT CONNECTORS

The model 31-A energy absorber is an indispensable component for forming a safe fall arrest system capable of withstanding the most demanding work situations. It is designed to be connected to a fall arrest harness via a suitable connector, without the use of lanyards.

The theoretical service life of the equipment is 15 years from the date of manufacture.

*Connectors sold separately






TECHNICAL SPECIFICATIONS

Absortion strap	WHITE BAND FORMED BY TWO INTRELACED TEXTILE PIECES	
Fixing and fastening strap	ORANGE POLYESTER BAND	
Peso	0,307kg	
CE Certification	EN355:2002	







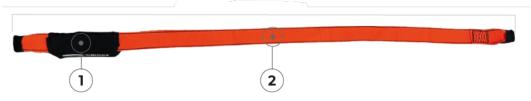


1, Absorption strap

White strap made up of two pieces of interwoven fabric, which are folded and are contained in a textile bag.

2. Fixing and fastening strap

The fixing and fastening strap is an orange polyester strip with sewn loops at the ends. The loops are protected by a polyester tubular tape.

MINIMUM SAFETY DISTANCE

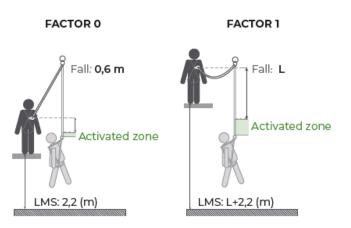



LMS= Minimum safety lenght

L= Length of the equipment



The maximum permissible length of the energy absorber including lanyard and connectors must not exceed 2 m

SAP	DESCRIPTION	EAN
CHS09040100	FALL PROTECTION KIT WITH ENERGY ABSORBER	8423246246803

Note: The technical information provided, verbally or in writing, is based on our current knowledge and should be regarded as non-binding collaboration. The use of the product is beyond our control, therefore we disclaim all liability for improper use of the product. The customer is responsible for confirming and evaluating (through testing) whether the product is suitable for the process and type of use in question. Our purpose is exclusively to guarantee the quality of the products in accordance with our standards.